



HAL
open science

Evaluation of nitrogen dioxide chemiluminescence monitors in a polluted urban environment

E. J. Dunlea, S. C. Herndon, D. D. Nelson, R. M. Volkamer, F. San Martini, P. M. Sheehy, M. S. Zahniser, J. H. Shorter, J. C. Wormhoudt, B. K. Lamb, et al.

► **To cite this version:**

E. J. Dunlea, S. C. Herndon, D. D. Nelson, R. M. Volkamer, F. San Martini, et al.. Evaluation of nitrogen dioxide chemiluminescence monitors in a polluted urban environment. *Atmospheric Chemistry and Physics*, 2007, 7 (10), pp.2691-2704. hal-00296236

HAL Id: hal-00296236

<https://hal.science/hal-00296236>

Submitted on 18 Jun 2008

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Evaluation of nitrogen dioxide chemiluminescence monitors in a polluted urban environment

E. J. Dunlea^{1,*}, S. C. Herndon², D. D. Nelson², R. M. Volkamer^{1,**}, F. San Martini¹, P. M. Sheehy¹, M. S. Zahniser², J. H. Shorter², J. C. Wormhoudt², B. K. Lamb³, E. J. Allwine³, J. S. Gaffney⁴, N. A. Marley⁴, M. Grutter⁵, C. Marquez⁶, S. Blanco⁶, B. Cardenas⁶, A. Retama⁷, C. R. Ramos Villegas⁷, C. E. Kolb², L. T. Molina^{1,8}, and M. J. Molina^{1,**}

¹Department of Earth, Atmospheric and Planetary Sciences, Massachusetts Institute of Technology, Bldg. 54, 77 Massachusetts Ave, Cambridge, MA 02139, USA

²Aerodyne Research Inc., 45 Manning Road, Billerica, MA 01821-3876, USA

³Laboratory for Atmospheric Research, Department of Civil and Environmental Engineering, Washington State University, 101 Sload Hall, Spokane Street, Pullman, WA 99164-2910, USA

⁴University of Arkansas at Little Rock, 2801 South University Avenue, Little Rock, AR 72204-1099, USA

⁵Centro de Ciencias de la Atmósfera, Universidad Nacional Autónoma de México, Mexico, D.F., Mexico

⁶Centro Nacional de Investigación y Capacitación Ambiental-INE, Av. Periférico 5000, Col. Insurgentes Cuicuilco, CP 04530, Mexico, D.F., Mexico

⁷Gobierno del Distrito Federal, Agricultura 21, Piso 1, Col. Escandon, Del. M. Hidalgo, CP 11800, Mexico, D. F., Mexico

⁸Molina Center for Energy and the Environment, 3262 Holiday Ct. Suite, 201 La Jolla CA, 92037, USA

* now at: University of Colorado at Boulder, Cooperative Institute for Research in Environmental Sciences, UCB 216, Boulder, CO 80309, USA

** now at: University of California at San Diego, 9500 Gilman Drive, 0356 La Jolla, CA 92093-0356, USA

Received: 13 December 2006 – Published in Atmos. Chem. Phys. Discuss.: 16 January 2007

Revised: 5 April 2007 – Accepted: 11 May 2007 – Published: 23 May 2007

Abstract. Data from a recent field campaign in Mexico City are used to evaluate the performance of the EPA Federal Reference Method for monitoring the ambient concentrations of NO₂. Measurements of NO₂ from standard chemiluminescence monitors equipped with molybdenum oxide converters are compared with those from Tunable Infrared Laser Differential Absorption Spectroscopy (TILDAS) and Differential Optical Absorption Spectroscopy (DOAS) instruments. A significant interference in the chemiluminescence measurement is shown to account for up to 50% of ambient NO₂ concentration during afternoon hours. As expected, this interference correlates well with non-NO_x reactive nitrogen species (NO_z) as well as with ambient O₃ concentrations, indicating a photochemical source for the interfering species. A combination of ambient gas phase nitric acid and alkyl and multifunctional alkyl nitrates is deduced to be the primary cause of the interference. Observations at four locations at varying proximities to emission sources indicate that the percentage contribution of HNO₃ to the interference decreases with time as the air parcel ages. Alkyl and multifunctional alkyl nitrate concentrations are calculated to reach concen-

trations as high as several ppb inside the city, on par with the highest values previously observed in other urban locations. Averaged over the MCMA-2003 field campaign, the chemiluminescence monitor interference resulted in an average measured NO₂ concentration up to 22% greater than that from co-located spectroscopic measurements. Thus, this interference has the potential to initiate regulatory action in areas that are close to non-attainment and may mislead atmospheric photochemical models used to assess control strategies for photochemical oxidants.

1 Introduction

Nitrogen oxides (NO_x = sum of nitrogen oxide (NO) and nitrogen dioxide (NO₂)) are primarily emitted as byproducts of combustion and participate in ozone (O₃) formation and destruction, thus playing a key role in determining the air quality in urban environments (Finlayson-Pitts and Pitts, 2000). NO₂ is designated as one of the United States Environmental Protection Agency's (US EPA) "criteria pollutants", which also include O₃, carbon monoxide (CO), sulfur dioxide (SO₂), airborne lead (Pb) and particulate matter (PM). The US EPA initiates regulatory action if an urban

Correspondence to: E. J. Dunlea
(edward.dunlea@colorado.edu)

area has criteria pollutant concentrations that exceed a certain threshold (either one hour averaged daily maxima, eight hour averaged daily maxima or annually averaged concentrations), referred to as being in “non-attainment”. While no counties in the US are currently in non-attainment for NO₂, the US EPA has recently announced sweeping new regulations aimed at reducing NO_x levels by 2015 (Environmental Protection Agency, 2005). Therefore, accurately measuring the concentration of NO₂, as mandated under the 1990 Clean Air Act Amendments, Section 182 (c)(1) (Demerjian, 2000), will become increasingly important. Positive interferences in the measurement of NO₂ may lead to the false classification of an urban area as being in non-attainment.

In addition to the regulatory purposes of monitoring, ambient measurements are also used by air quality models (AQM) for characterization and prediction of future high ozone episodes (Demerjian, 2000) and in validations of satellite measurements of NO₂ (Ordóñez et al., 2006; Schaub et al., 2006). Adequate diagnostic testing of AQM's requires uncertainties in NO₂ measurements of less than $\pm 10\%$ (Environmental Protection Agency, 2001; McClenny et al., 2002). There has also been considerable attention paid recently to the direct emissions of NO₂ from diesel vehicles (Friedeburg et al., 2005; Jenkin, 2004a; Jimenez et al., 2000; Latham et al., 2001; Pundt et al., 2005) and their resulting health effects (Beauchamp et al., 2004). These and other studies that rely on the data from monitoring networks, such as recent NO₂ source apportionment (Carslaw and Beevers, 2004, 2005) and oxidant partitioning (Jenkin, 2004b) studies, could be significantly affected by interferences in the standard methods for NO₂ measurement. Satellite measurements of NO₂ are often most sensitive to surface NO₂ concentrations; validation of these measurements requires accurate NO₂ surface measurements. In summary, assuring that NO₂ monitors routinely achieve a high level of precision is important for the accurate prediction of air quality and validation of satellite measurements.

Of the various techniques for measuring in situ NO and NO₂ concentrations, the most prevalent, and the Federal Reference Method as designated by the US EPA, is the chemiluminescence instrument (CL NO_x monitors) (Demerjian, 2000). This technique has been described in detail elsewhere (Fontjin et al., 1970; Ridley and Howlett, 1974). Briefly, it is based on the chemiluminescent reaction of NO with O₃ to form electronically excited NO₂, which fluoresces at visible and near infrared wavelengths. The technique is simple and relatively reliable. The detection sensitivity benefits from small background signal levels because no light source is necessary to initiate the fluorescence. Only an O₃-generating lamp and a modestly cooled photomultiplier (typically $\sim -4^\circ\text{C}$) are required; thus CL NO_x monitors are relatively inexpensive. Calibration involves the sampling of a known standard to determine the absolute response of the instrument; such standards are readily acquired. CL NO_x monitors typically operate in a mode that alternates between two

states: one that measures the concentration of NO by sampling ambient air directly, and one that measures the sum of NO and NO₂ by passing the ambient air stream over a catalyst (usually gold or molybdenum oxide, often heated) to convert NO₂ to NO. The difference of the two values is reported as the NO₂ concentration. Although instruments are available that utilize a flash lamp or laser to convert NO₂ to NO, this study only examines CL NO_x monitors with molybdenum oxide catalysts, which are the most prevalent type (Parrish and Fehsenfeld, 2000).

In addition to the advantages of CL NO_x monitors listed above, however, there are known interferences for this standard technique (see several recent reviews (Cavanagh and Verkouteren, 2001; Demerjian, 2000; Environmental Protection Agency, 1993; McClenny et al., 2002; Parrish and Fehsenfeld, 2000; Sickles, 1992)). The most significant issue with standard CL NO_x monitors is their inability to directly and specifically detect NO₂. It has been well established that other gas phase nitrogen containing compounds are converted by molybdenum oxide catalysts to NO and therefore can be reported as NO₂ by a standard CL NO_x monitor (Winer et al., 1974). As stated by the US EPA, “chemiluminescence NO/NO_x/NO₂ analyzers will respond to other nitrogen containing compounds, such as peroxyacetyl nitrate (PAN), which might be reduced to NO in the thermal converter. Atmospheric concentrations of these potential interferences are generally low relative to NO₂ and valid NO₂ measurements may be obtained. In certain geographical areas, where the concentration of these potential interferences is known or suspected to be high relative to NO₂, the use of an equivalent method for the measurement of NO₂ is recommended.” (Environmental Protection Agency, 2006) Additionally, manufacturers now use this same technology to make total reactive nitrogen (NO_y) measurements. Molybdenum oxide catalysts are known to efficiently reduce compounds such as NO₂, NO₃, HNO₃, N₂O₅, CH₃ONO₂, CH₃CH₂ONO₂, n-C₃H₇ONO₂, n-C₄H₉ONO₂, and CH₃CHONO and to a lesser extent also reduce HO₂NO₂, HONO, RO₂NO₂, NH₃ and particulate phase nitrate. These catalysts do not efficiently reduce N₂O, HCN, CH₃CN or CH₃NO₂ at typical operating converter temperatures lower than 400°C (Fehsenfeld et al., 1987; Williams et al., 1998). To emphasize this point, consider that the only difference between CL NO_x and NO_y monitors is the position of the catalyst: in a CL NO_y monitor, the catalyst is placed very close to the front of sampling inlet so as to convert all NO_y species, whereas in a CL NO_x monitor, the catalyst is placed after a particulate filter and just before the detection chamber, allowing the conversion and detection as “NO₂” of any gas phase nitrogen containing compounds not removed by passive loss on surfaces upstream of the converter.

Other more specific NO₂ detection techniques have been developed, including a photolysis technique to specifically convert NO₂ to NO that avoids using a metal catalyst while still employing the chemiluminescence reaction (Kley and

McFarland, 1980), an LIF technique (Thornton et al., 2000; Thornton et al., 2003), a fast gas chromatography luminol chemiluminescence detection (Marley et al., 2004), Differential Optical Absorption Spectroscopy (DOAS) (Platt, 1994; Platt and Perner, 1980), cavity ring down (Osthoff et al., 2006) and a Tunable Infrared Laser Differential Absorption Spectroscopy (TILDAS) technique (Li et al., 2004) (also described below). Several recent reviews provide a more complete description of these and other NO₂ measurement techniques (Demerjian, 2000; McClenny et al., 2002; Parrish and Fehsenfeld, 2000). Although several of these instruments have been shown to perform well in intercomparisons (Fehsenfeld et al., 1990; Gregory et al., 1990; Osthoff et al., 2006; Thornton et al., 2003), the majority of these techniques are, at this time, research grade instruments unsuitable for use in routine monitoring. A newer technique, Cavity Attenuated Phase Shift (CAPS) spectroscopy, has shown the potential to provide accurate spectroscopic measurements of NO₂ (0.3 ppb detection limit in <10 s) at a reasonable cost (Kebabian et al., 2005), but it is still in the development phase. Even if these other techniques gain prevalence in the coming years, the current widespread use of CL NO_x monitors makes understanding and quantifying interferences to this technique critical. Recent field studies have begun to quantify the magnitude of interferences to this technique, for example (Li et al., 2004) have shown a consistent positive measurement bias from CL NO_x monitors relative to an absolute TILDAS measurement of NO₂. Additionally, Steinbacher et al. (2007) have shown a persistent bias in CL NO_x monitors with molybdenum oxide converters over a time period of more than 10 years at rural locations in Switzerland. However, our study is one of the first field intercomparisons to directly quantify this interference and characterize the specific compounds responsible for it.

Our study uses data from the recent Mexico City Metropolitan Area (MCMA) field campaign during April of 2003 (MCMA-2003), which featured a comprehensive suite of both gas and particle phase instrumentation from numerous international laboratories, including multiple measurements of NO₂ (Molina et al., 2007). Here, we utilize this unique data set to evaluate the performance of standard CL NO_x monitors in a heavily polluted urban atmosphere, examine possible interferences and make recommendations for monitoring networks in general. Data from an exploratory field mission in the MCMA during February of 2002 are also presented. The meteorology during these campaigns has been discussed in detail elsewhere (de Foy et al., 2005; Molina et al., 2007).

2 Measurements

A major part of the MCMA-2002 and 2003 campaigns was the deployment of the Aerodyne Research, Inc. Mobile Laboratory (ARI Mobile Lab), a van equipped with a compre-

hensive suite of research grade gas and particle phase instrumentation (Herndon et al., 2005a; Kolb et al., 2004). The ARI Mobile Lab had two modes of operation during the campaigns: mobile and stationary. In mobile mode, the main objectives were either sampling of on-road vehicle exhaust or mapping of emission sources. In stationary mode, the ARI Mobile Lab was parked at a chosen site, typically making measurements for several days in a row. Stationary mode data in this study will be presented from four sites from the 2002 and 2003 field campaigns, which are described in detail elsewhere (Dunlea et al., 2006); briefly they are (1) CENICA (Centro Nacional de Investigacion y Capacitacion Ambiental) – the “supersite” for the MCMA-2003 campaign located on a university campus to the south of the city center, which receives a mix of fresh pollution from area traffic corridors and aged pollution from more downtown locations, (2) La Merced – a downtown location near an open market and a large traffic corridor, (3) Pedregal – an affluent residential neighborhood downwind of the city center, and (4) Santa Ana – a boundary site outside of the city, which receives mostly aged urban air during the day and rural air overnight.

The instruments on board the ARI Mobile Lab most relevant to this study were a TILDAS NO₂ instrument and a standard CL NO_x monitor. The TILDAS technique for measuring NO₂ has been described in detail elsewhere (Li et al., 2004) and only a brief description is presented here. TILDAS is a tunable infrared laser differential absorption measurement that employs a low volume, long path length astigmatic Herriott multipass absorption cell (McManus et al., 1995) with liquid nitrogen cooled laser infrared diodes and detectors. The laser line width is small compared to the width of the absorption feature and the laser frequency position is rapidly swept over an entire absorption feature of the molecule to be detected, NO₂ in this case. Accurate line strengths, positions and broadening coefficients are taken from the HITRAN data base (Rothman et al., 2003). Reference cells containing the gas of interest are used to lock the laser frequency position. Of the species in the HITRAN database in the NO₂ ν_2 wavelength region (1600 cm⁻¹), the next strongest absorber (CH₄) has nearby absorption lines which are six orders of magnitude weaker than the NO₂ lines used in these measurements. Additionally, the CH₄ lines are frequency shifted away from the main NO₂ features and this is resolved with the typical linewidth of the lead salt diode lasers used. Therefore, the measurements of NO₂ by tunable diode laser spectroscopy are believed to be interference-free. The mode purity of the diode was verified by measuring ‘black’ NO₂ lines in a reference cell along another optical path present in the instrument. The absolute accuracy of the concentrations measured by TILDAS is largely determined by how well the line strengths are known. For the absorption lines used in the two instrument channels, measuring NO and NO₂ respectively, the presently accepted band strengths are known to within 6% for NO and 4% for NO₂ (Smith et al., 1985). It is important to note that this

technique is an absolute concentration measurement, which does not require a calibration, and thus served as the benchmark against which to compare other NO₂ measurements. In general, calibrations in the field do greatly improve the confidence in the measurement and assist in evaluating the overall performance of the instrument. Though field calibrations have become routine now, via permeation sources and gas cylinders on the Mobile Lab platform, they were not done during the MCMA-2003 field campaign. On the particular instrument that did go to MCMA-2003, however, the second channel of the instrument was used to measure HCHO (Garcia et al., 2006; Herndon et al., 2005b); calibrations for this species demonstrated the pathlength was correct, and laboratory measurements of the pathlength using a pulsed light source indicate the cell was correctly aligned. Fortunately, for NO₂ measurements, the spectroscopy (and potential other absorbers) near 1600 cm⁻¹ is fairly well understood by virtue of being used so commonly.

Standard CL NO_x monitors have been described above and here we briefly describe the calibrations performed during the MCMA-2003 campaign. The standard calibration procedure involves zeroing the monitors while measuring NO_x-free air and then adding several specified amounts of NO to the instrument covering the desired operating range. The CL NO_x monitor on board the ARI Mobile lab was calibrated six times during the campaign, utilizing several different standardized mixtures of NO in nitrogen and NO/CO/SO₂ in nitrogen and resulting in no greater than an 8% deviation. Early in the campaign, technicians from RAMA, Red Automática de Monitoreo Ambiental (RAMA, 2005), calibrated both the CL NO_x monitor on board the Mobile Lab and the one on the CENICA rooftop during the same afternoon for consistency. RAMA operates 32 monitoring sites around the MCMA, many of which are equipped with standard CL NO_x monitors, all of which are calibrated via this same method. The RAMA network has been audited by the US EPA (Environmental Protection Agency, 2003), and was concluded to be “accurate and well-implemented”.

For the discussion below, it is important to establish that ambient concentrations of O₃ do not interfere with measured NO₂ concentrations from a CL NO_x monitor. O₃ levels within the detection chamber of these CL NO_x monitors are three orders of magnitude higher than ambient levels (Shivers, personal communication, 2004); thus ambient O₃ levels will not significantly influence the detection of NO in the CL NO_x monitors. The difference in residence time in the sampling lines to the CL NO_x monitor compared to the TILDAS instrument was small enough (<3 s) to preclude the reaction of ambient NO with ambient O₃ from contributing significantly to the measured differences in NO₂ concentrations.

For this study, measurements from the ARI Mobile Lab are used in conjunction with measurements from instruments at the various stationary sites. The instrumentation at the CENICA site included two long-path DOAS (LP-DOAS) instruments (Platt, 1994; Platt and Perner, 1980; Volkamer et

al., 1998) which measured NO₂ amongst a suite of other compounds. The detection limits for NO₂ were 0.80 and 0.45 ppb for DOAS-1 and DOAS-2 respectively. The La Merced site also included side-by-side open path Fourier transform infrared (FTIR) and DOAS instruments (Grutter, 2003). Both instruments measured numerous gas-phase compounds, but only data from the FTIR measurement of nitric acid (HNO₃; detection limit of 4 ppb) and from the DOAS measurement of NO₂ (detection limit of 3 ppb) are shown here. See companion paper (Dunlea et al., 2006) for more details on these stationary sites, including information about the inlets used for various measurement locations.

Additional measurements are presented here from Aerodyne Aerosol Mass Spectrometers (AMSs) (Jayne et al., 2000) that were on board the ARI Mobile lab and on the roof of the CENICA building. The AMS measures the size-resolved chemical composition of the non-refractory component of ambient particles smaller than 1.0 μm, including particulate phase nitrate (pNO₃⁻).

3 Results and discussions

3.1 Observation of interference

Simultaneous measurements of NO₂ on board the ARI Mobile Lab by the CL NO_x monitor and the TILDAS instrument revealed a recurring discrepancy where the CL NO_x monitor reported a higher NO₂ concentration than the TILDAS instrument. We consider the TILDAS measurement to be an absolute concentration measurement and thus this discrepancy is concluded to be an interference in the CL monitor. We define this “CL NO_x monitor interference” as the CL NO_x monitor NO₂ measurement minus a co-located spectroscopic NO₂ measurement.

CL NO_x monitor interference =

$$[\text{NO}_2] (\text{CLmonitor}) - [\text{NO}_2] (\text{spectroscopic}) \quad (1)$$

Figure 1 shows the CL NO_x monitor interference as observed during specific periods in both the 2002 and 2003 field campaigns. The periods in Fig. 1 are typical of the observations during both campaigns. The CL NO_x monitor interference was observed to occur daily, peaking in the afternoons during periods when ambient O₃ levels were highest. The CL NO_x monitor interference accounted for as much as 50% of the total NO₂ concentration reported by the CL NO_x monitor (30 ppb out of a reported 60 ppb for the 2002 campaign and 50 ppb out of 100 ppb for the 2003 campaign). The interference was observed at all fixed site locations visited by the ARI Mobile Lab, but was more readily detectable at the urban sites than the Santa Ana boundary site, owing simply to the lower overall NO₂ levels at the boundary site. Additionally, this CL NO_x monitor interference was present when comparing DOAS long path measurements of NO₂ to CL NO_x monitors at both the CENICA and La Merced sites. For

these sites, the CL NO_x monitor interference was more variable in time owing to the loss of spatial coherence when comparing a long path measurement with a point sampling data for a reactive species (for further discussion of open path versus point sampling comparison, see Dunlea et al. (2006) and San Martini et al. (2006a)).

The observation of such large CL NO_x monitor interference levels directly contradicts previous conclusions that this will only be an issue at rural or remote locations (Jenkin, 2004b). In summary, the CL NO_x monitor interference was observed to occur regularly and to roughly correlate with the ambient O₃ concentration; the subsequent section will explore the cause of this interference in more detail.

3.2 Examination of possible sources of interference

Potential sources for the interference in the chemiluminescence NO₂ measurement using the available data from the MCMA 2003 campaign are explored: (1) some portion of the non-NO_x fraction of reactive nitrogen (NO_z) and (2) gas phase olefinic hydrocarbons or gas phase ammonia.

3.2.1 The Non-NO_x Fraction of Reactive Nitrogen (NO_z)

It has been long established that molybdenum converters within standard CL NO_x monitors have a potential interference in the NO₂ measurement due to gas phase reactive nitrogen compounds (Demerjian, 2000; Environmental Protection Agency, 2006; Parrish and Fehsenfeld, 2000). The ARI Mobile Lab as configured for the MCMA-2003 campaign included a total NO_y instrument (TECO 49C), which measures both NO_y and NO using the chemiluminescence technique, but configured differently than a standard CL NO_x monitor so as to purposely exploit the molybdenum converter's ability to detect more gas phase reactive nitrogen species. From the CL NO_y monitor NO_y and NO measurements, along with the TILDAS NO₂ measurement, we calculated the non-NO_x fraction of NO_y, referred to as NO_z. Table 1 lists the results of linear least-squares fits of the correlation plots of the CL NO_x monitor interference versus NO_z at the various locations visited by the ARI Mobile Lab. The CL NO_x monitor interference level varied linearly with the NO_z concentration, and was smaller in magnitude, indicating that some portion of NO_z was responsible for the interference. Fair to good correlation ($R^2=0.32-0.79$) was observed at all sites visited by the ARI Mobile Lab, with ratios of the CL NO_x monitor interference to NO_z=(0.44–0.66). Thus, the obvious and expected conclusion is that some reactive nitrogen compound or compounds are the cause of the observed CL NO_x monitor interference.

This type of comparison has a number of inherent limitations. Negative values for the CL NO_x monitor interference are often recorded because this calculated value is the subtraction of two measurements. In general, more variance in this subtracted quantity is expected when an open path spec-

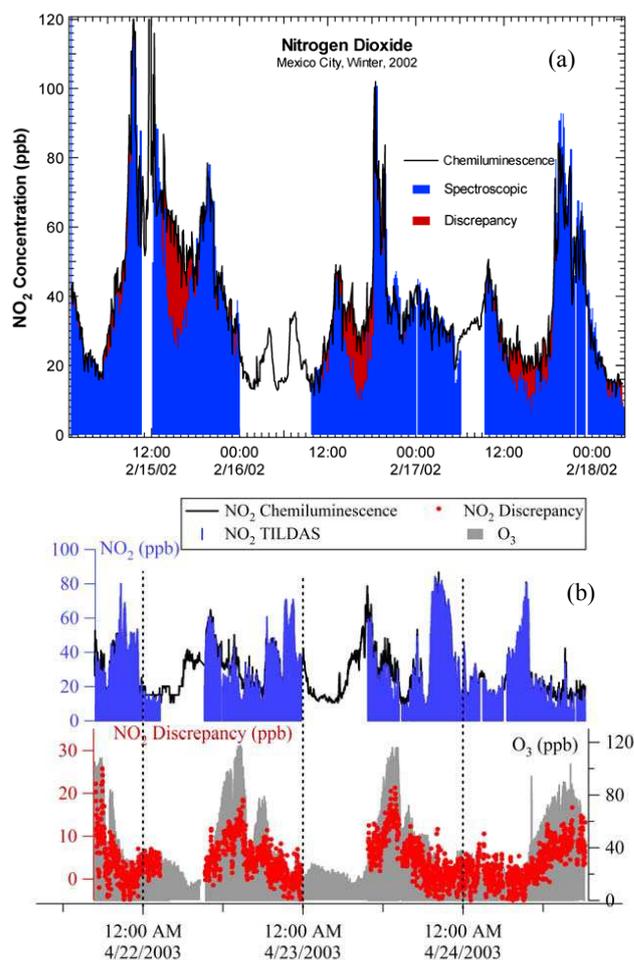


Fig. 1. (a) Time series of NO₂ measurements by standard CL NO_x monitor and TILDAS spectroscopic instruments on board ARI Mobile Lab at the Pedregal fixed monitoring site during 2002 campaign for a specific period highlighting when the chemiluminescence instrument showed an interference. (b) Time series for one-minute averaged measurements made on board ARI Mobile Lab at the Pedregal fixed monitoring site during MCMA-2003 field campaign for a specific period. The CL NO_x monitor interference is plotted on its own axis in this figure to show the correlation in time with ambient O₃ levels, which indicates a photochemical source of the interfering compound(s).

troscopic measurement is subtracted from a point sampling CL NO_x monitor measurement, limiting the achievable R^2 values for these correlation plots. We also note here that the onset of the daily rise of the CL NO_x monitor at CENICA is delayed relative to the other three sites by ~2 h: from 10 AM onset elsewhere to 12 PM onset at CENICA. CENICA also experiences the highest percentage of negative CL NO_x monitor interference measurements indicating that the open path DOAS light paths may be influenced by NO_x sources, such as roadways underneath the light paths, which do not advect to the CENICA rooftop sampling location. San Martini et

Table 1. Slopes of linear least squares fit of correlation plots of observed CL NO_x monitor interference versus other measured species at series of locations. R^2 values for fits are given in parentheses. All concentrations for correlation plots are 15 min averages and are reported in ppb or equivalent ppb. Maxima, minima, and averages for slopes are listed. Abbreviations: NA = measurement data Not Available at particular location, ID = Insufficient Data available at particular location, ML = data from ARI Mobile Lab in stationary mode, Roof = long path instruments at fixed site locations. Stationary sites are: STA = Santa Ana, PED = Pedregal, MER = La Merced and CEN = CENICA headquarters; see text for description. NO_z, O₃ and HNO₃ are highlighted as showing the best correlations.

Species Correlated with CL NO _x Monitor Interference	ML STA	ML PED	ML MER	ML CEN	Roof CEN	Roof MER	Min	Max	Avg
PTRMS Olefin Proxy m/z 71	1.19 (0.05)	-1.56 (0.03)	-0.86 (0.03)	ID	NA	NA	-1.56	1.19	-0.41
PTRMS Olefin Proxy m/z 43	0.36 (0.12)	-0.2 (0.01)	-0.15 (0.06)	ID	NA	NA	-0.2	0.36	0.00
FIS Monitor Total Olefins	NA	NA	NA	-0.13 (0.04)	-0.15 (0.32)	NA	-0.15	-0.13	-0.14
NH ₃	-0.03 (0.03)	0.34 (0.04)	-0.06 (0.17)	0.14	-0.05 (0.01)	0.49 (0.01)	-0.06	0.49	0.14
PAN	NA	NA	NA	ID	4.07 (0.09)	NA			4.07
AMS Particulate Nitrate	2.44 (0.15)	1.74 (0.12)	-0.44 (0.01)	1.68 (0.01)	0.28 (0.01)	NA	-0.44	2.44	1.14
NO_z	0.54 (0.65)	0.66 (0.79)	0.44 (0.32)	0.49 (0.35)	NA	NA	0.44	0.66	0.53
O₃	0.06 (0.30)	0.09 (0.54)	0.09 (0.19)	ID	0.11 (0.21)	0.15 (0.21)	0.06	0.19	0.10
HNO₃	NA	NA	NA	NA	NA	1.83 (0.44)			1.83

al. (2006b) have discussed the limitations of this NO_z measurement in more detail.

As shown in Figs. 1 and 3, the CL NO_x monitor interference peaked in magnitude during the afternoons, corresponding to peaks in the ambient O₃ concentration. The CL NO_x monitor interference shows a fair correlation with the co-located measured O₃ concentration at all locations ($R^2=0.19-0.54$); see Fig. 2 and Table 1. The magnitude of the CL NO_x monitor interference concentration was approximately 10% of the ambient O₃ concentration. We have established above that ambient O₃ does not represent an interference to the NO₂ measurement; this is further corroborated by the poor correlation of the measured CL NO_x monitor interference with the product of ambient concentrations of [NO] \times [O₃] (regression $R^2=0.03$). Thus, we conclude that the CL NO_x monitor interference was primarily due to reactive nitrogen species that are produced photochemically along with O₃.

We now examine the individual species that make up NO_z in order to determine the most likely contributors to the CL NO_x monitor interference. We start by removing from consideration those reactive nitrogen species which are not converted by the molybdenum oxide catalyst, e.g., amines (Winer et al., 1974), or whose concentrations do not peak during the afternoon, specifically nitrous acid (HONO), other organic nitrites, the nitrate radical (NO₃) and N₂O₅. HONO was measured directly by the DOAS instrument at the CENICA supersite and observed to have its highest concentrations during the morning. Other organic nitrites are unlikely to have concentrations that approach ppb levels and will have photolytic loss rates that maximize in the afternoon, making it very unlikely that they could contribute significantly to the observed CL NO_x monitor interferences. Lastly, measured concentrations of NO₃ and N₂O₅ are observed almost exclusively at night, excluding them from possible con-

tribution to the observed daytime interference. Thus, our most likely candidates are (a) particulate nitrate, (b) peroxyacetyl nitrate and other peroxyacyl nitrates, (c) nitric acid (d) alkyl and multifunctional alkyl nitrates and (e) a combination of more than one of these species.

(a) Particulate phase nitrate (pNO₃⁻) may be converted by the CL NO_x monitor and reported as NO₂ if sufficiently particles penetrate the particulate filter on the CL NO_x monitor to reach the molybdenum oxide converter. The particulate filter on a CL NO_x monitor typically filters out particles with diameters larger than 200 nm. Measurements from MCMA-2003 with two AMS instruments reveal that only a small fraction of the particle mass was found to be contained in particles with diameters <200 nm (Salcedo et al., 2006). Thus, of the measured levels of submicron pNO₃⁻, only a small fraction would be expected to enter a CL NO_x monitor resulting in a potential interference. Additionally, the dissociation of particulate NH₄NO₃ to gas phase HNO₃ from either the filter or surfaces within the instrument and/or sampling line could contribute to this interference. None of the inlets for the NO₂ instruments listed in the experiment section were heated, such that this effect is likely to have been minimal. Thus, we do not expect pNO₃⁻ do contribute significantly to the CL NO_x monitor interference.

This is confirmed by comparing the diurnal profiles of pNO₃⁻ and the CL NO_x monitor interference (Fig. 3); concentrations of submicron pNO₃⁻ (as converted to its equivalent gas phase concentration) were significantly smaller than the CL NO_x monitor interference and peaked a few hours before the maximum in the CL NO_x monitor interference. Table 1 reports only a weak correlation ($R^2<0.15$) of the CL NO_x monitor interference with the measured ambient submicron pNO₃⁻ levels for all sites. Overall, it is clear that pNO₃⁻ does not contribute significantly to the observed CL NO_x monitor interference in Mexico City.

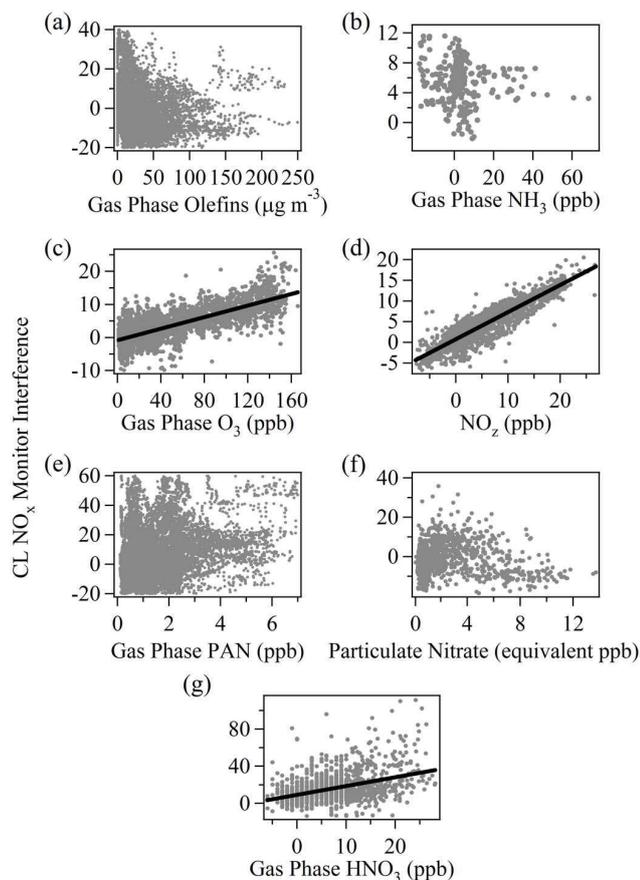


Fig. 2. Linear regression plots for the CL NO_x monitor interference plotted versus (a) gas phase olefins (CENICA), (b) gas phase NH₃ (Santa Ana), (c) gas phase O₃ (Pedregal), (d) NO_z (Pedregal), (e) gas phase PAN (CENICA), (f) particulate nitrate (La Merced), and (g) gas phase HNO₃ (La Merced). See text for description of measurements. Results of the linear regressions are listed in Table 1.


(b) Peroxyacetyl nitrate (PAN) is often found in large quantities in urban atmospheres and concentrations >30 ppb have been observed in the past in Mexico City (Gaffney et al., 1999). The MCMA-2003 field campaign included a PAN measurement at the CENICA supersite (Marley et al., 2007) revealing much lower PAN concentrations (maximum <15 ppb) that peak in mid-morning (Fig. 3b); this does not match the diurnal pattern of the CL NO_x monitor interference. The results of the correlation plots of the CL NO_x monitor interference versus the measured PAN concentrations on the CENICA rooftop show an $R^2=0.09$. Modeling studies of the outflow of pollution from Mexico City (Madronich, 2006) and more recent measurements downwind of the city (Farmer, D. K., Wooldridge, P. J., and Cohen, R. C., personal communication, 2006) show that peroxyacetyl nitrate compounds can account for a significant fraction of the NO_z budget in the outflow from Mexico City. Although PAN is known to be converted to NO₂ on heated surfaces, and as

such, PAN may contribute more significantly to this interference in other locations that experience higher PAN concentrations, we conclude that PAN does not contribute significantly to the observed CL NO_x monitor interference in this study because of its low ambient concentrations.

(c) Nitric acid (HNO₃) is photochemically produced within urban atmospheres and has been observed in significant concentrations in Mexico City (Moya et al., 2004). Production of HNO₃ is generally on the same time scale as production of O₃, since both involve the formation of NO₂. O₃ is formed when NO₂ photolyzes via a two step process:



(where M represents a third body colliding molecule, presumably N₂ or O₂). HNO₃ is formed from the association reaction of OH with NO₂



The measured concentrations of NO₂ and OH during MCMA-2003 (Volkamer et al., 2005) indicate that HNO₃ production rates via reaction (4) are quite large (>15 ppb hr⁻¹ at maximum). However, losses for HNO₃ within an urban area are also significant, and the ambient concentration depends on the balance between the production and loss rates. In the presence of NH₃, HNO₃ will readily form particle phase ammonium nitrate (NH₄NO₃). HNO₃ is also readily lost on surfaces by dry deposition (Neuman et al., 1999), but there is a large range of deposition velocities in the literature (4–26 cm s⁻¹) and an exact loss rate is difficult to estimate (Neuman et al., 2004; Wesely and Hicks, 2000). It is thus preferable to rely on measurements of HNO₃ as much as possible. During the MCMA-2003 campaign, the only direct HNO₃ concentration measurements were from the open path FTIR operated by the UNAM group at the La Merced site (Flores et al., 2004; Moya et al., 2004). Although the measured HNO₃ concentrations show reasonably good correlation with the CL NO_x monitor interference concentrations ($R^2=0.44$), the slope of the correlation plot (1.41) indicates that HNO₃ accounts for ~60% of the CL NO_x monitor interference.

For the locations that did not have a measurement of HNO₃, we use modeled values to estimate the possible contribution of HNO₃ to the CL NO_x monitor. San Martini et al. (2006a, b) have used an ISORROPIA model embedded in a Markov Chain Monte Carlo algorithm to analyze aerosol data and to predict the gas phase HNO₃ concentrations at the locations included in this study. Diurnal profiles of these predicted HNO₃ concentrations are included in Fig. 3. In general, HNO₃ levels are shown to be large enough to account for the measured CL NO_x monitor interference. However, we note that the measured HNO₃ concentrations at La Merced are lower than the predicted levels. We therefore generally



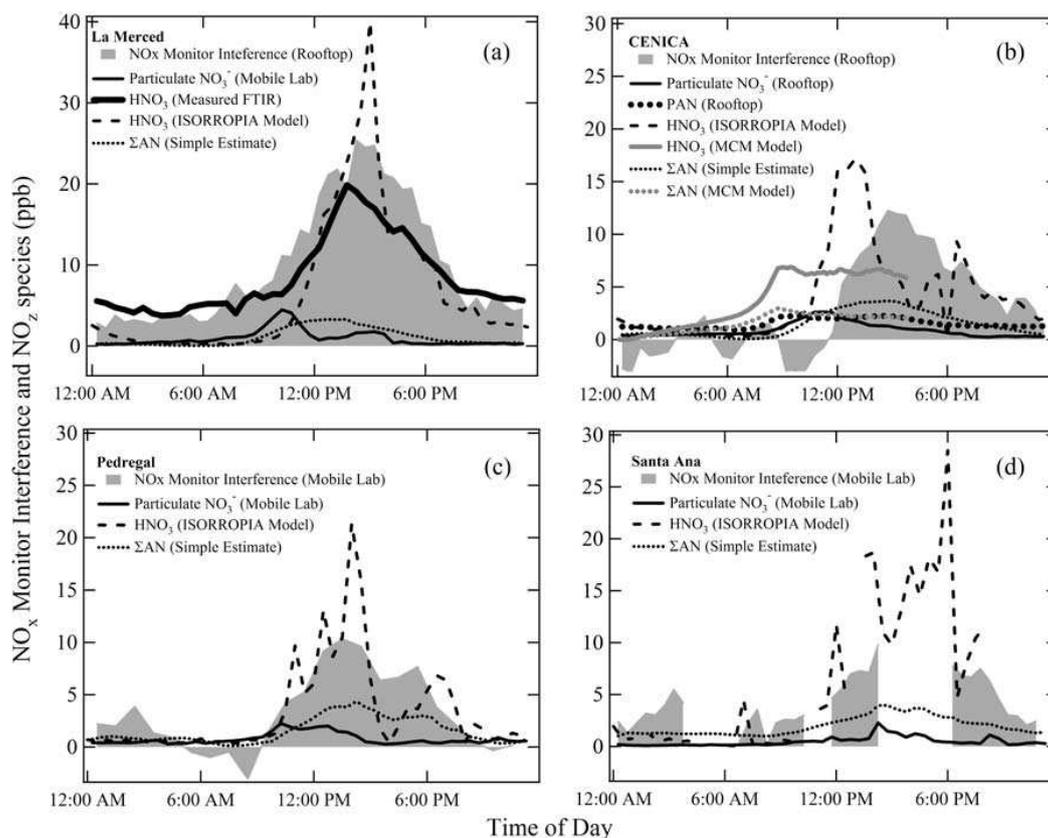


Fig. 3. Diurnally averaged profiles for measured CL NO_x monitor interference, calculated alkyl nitrate concentrations, measured PAN concentrations and measured particulate nitrate in equivalent gas phase concentration as observed at the four fixed sites. Note that only a small fraction of particulate nitrate mass, from particles with diameters <200 nm, could potentially contribute to the NO_x monitor interference. Time of day is for local time. Profiles averaged over the entire MCMA-2003 campaign where possible; exceptions are for Mobile Lab data which were available for several day periods while the Mobile Lab was at particular fixed locations (see text). Gaps in profiles are due to limited data.

conclude that HNO₃ accounts for most, but not all, of the observed CL NO_x monitor interference.

As an added complication, HNO₃ is efficiently lost on stainless steel and other surfaces (Neuman et al., 1999). The efficiency with which HNO₃ will reach the molybdenum converter within a particular CL NO_x monitor is then dependent on the amount of stainless steel surface area in the inlet manifold, and thus unique to each monitor. Thus, it is not possible to easily extrapolate this result to all CL NO_x monitors. We generally conclude, however, that HNO₃ accounts for a significant portion of the CL NO_x monitor interference.

(d) Alkyl and multifunctional organic nitrates (from hereon referred to as “alkyl nitrates”) are known to be produced simultaneously with O₃ from the minor branch (5b) of the reaction of NO with peroxy radicals (Day et al., 2003; Rosen et al., 2004; Trainer et al., 1991).



There were no direct measurements of alkyl nitrates as part of the MCMA-2003 campaign of which we are aware. Instead, to study the formation of alkyl nitrates (and HNO₃), we employ a flexible top photochemical box model, which was constrained by measurements conducted at the CENICA supersite for OH sources and sinks from VOC and NO_x. Model simulations were performed with the Master Chemical Mechanism (MCMv3.1) (Jenkin et al., 2003; Saunders et al., 2003) on a 24-h basis constrained with 10-minute averaged measurements of major inorganic species (NO, NO₂, HONO, O₃ and SO₂), CO, 102 volatile organic compounds (VOC), HO_x (=OH+HO₂) measurements, temperature, pressure, water vapor concentration, photolysis frequencies, and dilution. MCMv3.1 is a near-explicit mechanism, i.e. with minimized lumping of VOC reaction pathways, and thus well suited for source-apportionment of organic nitrates and HNO₃ (Sheehy et al., 2007¹). Figure 3 shows the diurnal

¹Sheehy, P. M., Volkamer, R. M., Molina, L. T., and Molina, M. J.: Radical Cycling in the Mexico City Metropolitan Area

profile of the modeled concentrations of alkyl nitrates and HNO₃ from the MCM model. Note that the model does not account for horizontal transport and thus modeled concentrations of stable species begin accruing above realistic values after 4 PM local time due to planetary boundary layer dynamics.

Preliminary results from observations from a recent field campaign in 2006 (Farmer, D. K., Wooldridge, P. J., and Cohen, R. C., personal communication, 2006) as well as modeling of the outflow of pollution from Mexico City (Madronich, 2006) show that the sum of all alkyl nitrates, ΣAN , comprises roughly (10–30)% of NO₂ in the outflow of Mexico City. Additionally, preliminary results from aircraft measurements of alkyl nitrates made during this same field campaign confirm the presence of alkyl nitrates in the outflow from Mexico City (Blake, D. R. and Atlas, E. L., personal communication, 2006). Alkyl nitrates are thus a non-negligible part of the NO₂ budget.

For the locations where measurements of OH and other radicals were not available to constrain the MCM model, we make simple estimates of the alkyl nitrate concentrations based on the measured [O₃]. Using the notation of Day et al. (2003), the branching ratio for the formation of an alkyl nitrate in channel (5b) is defined as α . A general correlation of alkyl nitrates with O₃ is expected because both are photochemically generated in the atmosphere. Subsequent reactions of the alkoxy radical (RO₂) in channel (5a) with O₂ lead to the formation of an HO₂ molecule which reacts to form a second NO₂ molecule, which then produces O₃ via reactions (2) and (3) above. Thus, for each reaction of RO₂ with NO in reaction (5), there is either the formation of one alkyl nitrate or two O₃ molecules. As a result, the slope of a plot of ambient [O₃] versus calculated [ΣAN] is $2(1-\alpha)/\alpha$. We use this relationship to make a simple estimate of [ΣAN] based on the measured [O₃].

We estimate a value for α within Mexico City (α_{MCMA}) based on the measured volatile organic carbon (VOC) speciation. The MCMA-2003 campaign included numerous measurements of the overall VOC loading and speciation thereof (Velasco et al., 2007). Using average speciated VOC concentrations as measured during the campaign and measurements and/or estimates for the branching ratios for channel (5b) of the individual VOC compounds, we calculate α_{MCMA} in a similar manner to the calculations of Rosen et al. (2004) for La Porte, Texas. The ambient VOC mix in Mexico City is heavily dominated by propane (29% by volume) and lighter alkanes ($\leq\text{C}_5$, 25%), with additional contributions from alkenes (9%), aromatics (8%), heavier alkanes (8%), acetylene (3%) and MTBE (2%), with 15% of the VOC loading left as unidentified. This unidentified portion of the VOC mixture most likely consists of oxygenated VOCs, with branching ratios for reaction (5b) similar to the analo-

gous alkanes and alkenes. We assume a value of α for this unidentified portion of the VOC loading equal to the average of the identified VOCs. We then weight the value of α for each VOC compound by its OH reactivity to determine a best estimate for $\alpha_{\text{MCMA}}=0.063$. Multiplying the measured [O₃] by this α_{MCMA} gives a time series of the estimated total concentration of alkyl nitrates, [ΣAN], for the various locations in this study. Diurnal profiles of the estimated [ΣAN] are shown in Fig. 3. This simple estimate reveals maxima in [ΣAN] of nearly 5 ppb, which are as large as the largest observed [ΣAN] in other locations (Rosen et al., 2004). Although ambient VOC concentrations in MCMA are larger than in other urban locations, the MCMA VOC speciation is dominated by light alkanes that do not form alkyl nitrates as readily as longer chain VOCs. For the CENICA supersite, the MCM modeled profile of alkyl nitrates shows a maximum value in the morning, while this simple estimate based on the measured [O₃] shows a peak in afternoon (corresponding to the peak in the O₃ concentration). This is likely due to the suppression of O₃ concentrations at the CENICA site during the morning hours due to nearby NO_x sources mentioned earlier. Overall, the simple estimate provides a rough gauge to the magnitude of [ΣAN] expected in a given location.

(e) From the previous sections, we have concluded that HNO₃ and alkyl nitrates contribute to the CL NO_x monitor interference in Mexico City. There is an observable trend in going from “fresh” to “aged” sites, where the contribution of alkyl nitrates relative to the magnitude of the CL NO_x monitor increases moving from the sites in closest proximity to high emissions levels (La Merced and then CENICA) to the sites that are furthest away from large emission sources (Pedregal and then Santa Ana). The estimated [ΣAN] is roughly constant at all locations such that the decreasing magnitude of the CL NO_x monitor interference in going from fresh to aged sites is explained by decreasing amounts of HNO₃, i.e., as the air parcel ages, HNO₃ is lost from the gas phase to either particulate nitrate or via dry deposition. If we examine the La Merced (the “freshest” site), the sum of the measured HNO₃ and the estimated ΣAN results in a significantly better agreement of the linear correlation plot (slope=0.97, $R^2=0.53$). The diurnal profile shown in Fig. 4 closely matches that of the interference. In summary, we conclude that close to the sources of the emissions, the combination of HNO₃ and ΣAN account for the CL NO_x monitor interference, and as the urban air parcel ages, ΣAN comprises a larger percentage of the interference.

3.2.2 Gas phase olefins and ammonia

The chemiluminescent reaction of ambient gas phase olefins with excess O₃ within the CL NO_x monitor reaction chamber, where the resulting fluorescence is recorded as NO₂, is a potential interference to the CL NO_x monitor. However, no correlation of the measured CL NO_x monitor interference was observed with olefin concentrations measured during the

(MCMA): Modeling RO_x Using a Detailed Mechanism, to be submitted, 2007.

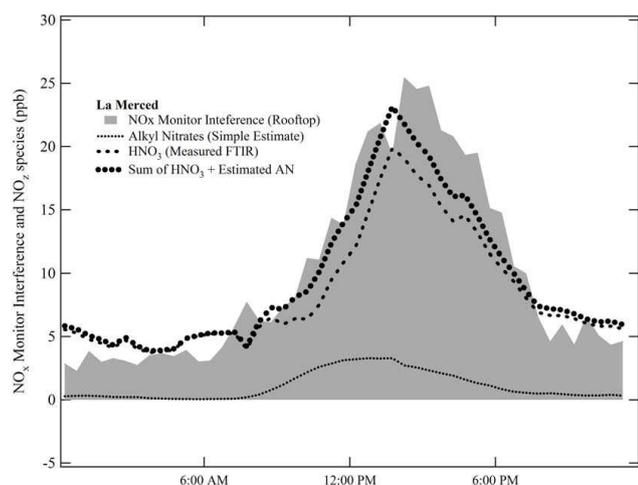


Fig. 4. Diurnally averaged profiles for measured CL NO_x monitor interference, measured HNO₃ concentrations and calculated alkyl nitrate concentrations at La Merced site. Profiles averaged over the entire MCMA-2003 campaign. Also included is a profile of the sum of the measured HNO₃ concentration plus the estimated alkyl nitrate concentration (see text). Time of day is for local time.

MCMA-2003 field campaign from either a Proton Transfer Reaction Mass Spectrometer (PTRMS) on board the ARI Mobile Lab (Rogers et al., 2006) or a Fast Isoprene Sensor (FIS) at the CENICA supersite (Velasco et al., 2007). Results from the linear correlation plots are listed in Table 1. The daily peak in the olefin levels was observed during the morning hours, which does not coincide with the afternoon peak in the CL NO_x monitor interference.

Another possibility for the cause of the CL NO_x monitor interference is gas phase ammonia (NH₃), which has been shown to be converted by molybdenum oxide catalysts with an efficiency somewhere between a few percent (Williams et al., 1998) and 10% (Shivers, personal communication, 2004). A TILDAS system utilizing a Quantum Cascade Laser (QCL) to monitor gaseous ammonia was deployed on board the ARI Mobile Lab for the MCMA-2003 campaign. Measured ambient NH₃ concentrations were not sufficient to account for the observed CL NO_x monitor interferences (typical [NH₃] < 30 ppb) and NH₃ concentrations peaked during the morning before the break up of the boundary layer (earlier than 11 AM local time), indicating a significant source from automobiles (San Martini et al., 2006a), which does not correspond to the afternoon maxima in the CL NO_x monitor interference. The slopes of correlation plots of the CL NO_x monitor interference versus the measured NH₃ concentrations were less than 0.34 and *R*² values did not exceed 0.17, indicating no significant correlation (see Table 1).

Based on these observations, we conclude that neither gas phase olefins nor ammonia contributed significantly to the observed CL NO_x monitor interference.

3.3 Impact of CL NO_x monitor interference

The CL NO_x monitor interference has been shown to account for up to 50% of the measured NO₂ concentration in Mexico City; interferences of this order could impact the non-attainment status of urban areas. The diurnal profile of the CL NO_x monitor interference peaks in the afternoon when NO₂ concentrations are relatively low, impacting annual standards for NO₂, such as those used by Canada and the United States (Demerjian, 2000), more so than daily 1-h maxima standards. For the MCMA-2003 campaign, the averaged NO₂ concentration (the closest comparison to the annual standard we can do with this data) as measured by CL NO_x monitors was higher than co-located spectroscopic techniques by up to 22% at the four sites in this study (see Table 2). For example, the averaged NO₂ concentration measured at La Merced by the CL NO_x monitor was 49.5 ppb versus 40.6 ppb measured by the co-located DOAS instrument; the former measurement comes much closer to the 53 ppb US EPA annually averaged threshold for non-attainment (Environmental Protection Agency, 1993). (We note that our maximum observed NO₂ concentration in this study for a 1-h averaged of 185 ppb was significantly lower than the Mexican air quality standard of 210 ppb for a 1-h averaged concentration (Finlayson-Pitts and Pitts, 2000).)

Air quality models require uncertainties in NO₂ measurements of roughly ±10%. As such, the observed interferences of up to 50% are unacceptable for the proper evaluation of air quality models (McClenny et al., 2002). In the following section we make several recommendations for how to avoid this interference in the future.

4 Conclusions

It has been shown that high levels of ambient reactive nitrogen species can lead to a severe overestimation of ambient NO₂ concentrations by standard chemiluminescence monitors equipped with molybdenum oxide converters. This study is one of the first to quantify this CL NO_x monitor interference and explore its causes in detail. In Mexico City, the observed CL NO_x monitor interference was shown to have no significant contribution from gas phase olefins or ammonia. The good correlation of the CL NO_x monitor interference with ambient O₃ and NO_z concentrations and poor correlation with PAN and particulate nitrate lead to the conclusion that a combination of photochemically produced gas phase nitric acid and alkyl and multifunctional alkyl nitrates is primarily responsible for this interference in this study. It is expected that in other environments with larger ambient PAN concentrations, PAN will contribute to this CL NO_x monitor interference even though it did not in this study. The percentage contribution of HNO₃ to the interference decreases as the air parcel moves away from fresh emission sources. Modeling and calculations reveal that ambient alkyl nitrates

Table 2. Averaged measured NO₂ concentrations for 5 week MCMA-2003 campaign by spectroscopic techniques compared to co-located CL NO_x monitors at 4 locations.

Site	Spectroscopic Instrument	MCMA Campaign Average	CL NO _x Monitor	MCMA Campaign Average	% Difference
La Merced	DOAS-UNAM	40.6	RAMA	49.5	+22%
CENICA	DOAS-1	34.1	CENICA	31.0	-9% ^a
	DOAS-2	28.0			+11%
Pedregal	TILDAS-ML ^b	27.6	ML ^b	29.4	+7%
			RAMA	30.7	+11%
Santa Ana	TILDAS-ML ^b	3.8	ML ^b	9.1	140%

^a DOAS-1 believed to have larger NO_x concentrations than CENICA rooftop owing to major roadway beneath the light path, see discussion above and (Dunlea et al., 2006).

^b The ARI Mobile Lab visit each location for only a few days, which may not be a representative sample of the average NO₂ concentration at each location.

concentrations in the MCMA are significant, up to several ppb, which is as high as those observed in other urban locations, and plausible given the high VOC loadings in Mexico City. During the MCMA-2003 field campaign, the CL NO_x monitor interference caused the average measured NO₂ concentration to be larger than co-located spectroscopic measurements by up to 22%. This magnitude of interference is inappropriately large for use in modeling studies and may lead to a non-attainment status for NO₂ to be incorrectly assigned in certain urban areas.

To finish, we make several recommendations: (1) There exists the possibility that currently employed CL NO_x monitors could be retrofitted with photolytic converters to replace molybdenum oxide converters. Such photolytic converters have been shown to perform well in the field (Thornton et al., 2003; Williams et al., 1998). (2) In order to avoid this interference in the long term, instrument manufacturers should pursue low-cost, interference-free techniques for measuring NO₂, which would significantly improve the quality of data from ambient monitoring networks. These include photolytic converters and spectroscopic techniques, including instruments that are already on the market (www.ecophysics.com and www.dropletmeasurement.com). We are not aware, however, of any that have been thoroughly tested in a polluted urban environment. (3) CL NO_x monitors are capable of measuring NO reliably; rather than discard currently in-use CL NO_x monitors, it is possible that those instruments with molybdenum oxide converters could be configured to exploit the ability of the molybdenum oxide converter to reduce reactive nitrogen species to NO, i.e., to measure NO and NO_y. As mentioned above, commercially instruments are currently available that do just this. Monitoring networks could then report NO and NO_y with this instrument instead of NO and NO₂. (4) Post-correction of NO₂ measurements from CL NO_x monitors with molybdenum oxide converters may prove effective in certain circumstances, but must be done carefully, as discussed in Steinbacher et al. (2007).

Acknowledgements. The authors would like to thank M. J. Elrod, K. Dzepina, and J. L. Jimenez for helpful discussions. Financial support from Comision Ambiental Metropolitana (Mexico), the National Science Foundation (ATM-308748, ATM-0528170 and ATM-0528227) and the Department of Energy (DE-FG02-05ER63980 and DE-FG02-05ER63982) is gratefully acknowledged. R. Volkamer is a Dreyfus Postdoctoral Fellow. J. Gaffney and N. Marley acknowledge support of the Department of Energy's Atmospheric Science Program.

Edited by: U. Pöschl

References

- Beauchamp, J., Wisthaler, A., Grabmer, W., Neuner, C., Weber, A., and Hansel, A.: Short-term measurements of CO, NO, NO₂, organic compounds and PM₁₀ at a motorway location in an Austrian valley, *Atmos. Environ.*, 38, 2511–2522, 2004.
- Carslaw, D. C. and Beevers, S. D.: Investigating the potential importance of primary NO₂ emissions in a street canyon, *Atmos. Environ.*, 38, 3585–3594, 2004.
- Carslaw, D. C. and Beevers, S. D.: Estimations of road vehicle primary NO₂ exhaust emission fractions using monitoring data in London, *Atmos. Environ.*, 39, 167–177, 2005.
- Cavanagh, R. R. and Verkouteren, R. M., Improving the Scientific Basis for Informed Decisions on Atmospheric Issues, NIST-NOAA-Industry Workshop on Atmospheric Measures and Standards, National Institute of Standards and Technology, 2001.
- Day, D. A., Dillon, M. B., Wooldridge, P. J., Thornton, J. A., Rosen, R. S., Wood, E. C., and Cohen, R. C.: On alkyl nitrates, O₃, and the “missing NO_y”, *J. Geophys. Res.*, 108(D16), 4501, doi:10.1029/2003JD003685, 2003.
- de Foy, B., Caetano, E., Magaña, V., Zitácuaro, A., Cardenas, B., Retama, A., Ramos, R., Molina, L. T., and Molina, M. J.: Mexico City basin wind circulation during the MCMA-2003 field campaign, *Atmos. Chem. Phys.*, 5, 2267–2288, 2005, <http://www.atmos-chem-phys.net/5/2267/2005/>.
- Demerjian, K. L.: A review of national monitoring networks in North America, *Atmos. Environ.*, 34, 1861–1884, 2000.
- Dunlea, E. J., Herndon, S. C., Nelson, D. D., Volkamer, R. M., Lamb, B. K., Allwine, E. J., Grutter, M., Villegas, C. R. R., Mar-

- quez, C., Blanco, S., Cardenas, B., Kolb, C. E., Molina, L. T., and Molina, M. J.: Evaluation of Standard Ultraviolet Absorption Ozone Monitors in a Polluted Urban Environment, *Atmos. Chem. Phys.*, 6, 3163–3180, 2006, <http://www.atmos-chem-phys.net/6/3163/2006/>.
- Environmental Protection Agency, U.S.: Air Quality Criteria for Oxides of Nitrogen, Office of Research and Development, http://www.epa.gov/ttn/naqs/standards/nox/s_nox_index.html, 1993.
- Environmental Protection Agency, U.S.: Recommended Methods for Ambient Air Monitoring of NO, NO₂, NO_y, and Individual NO_x Species, National Exposure Research Laboratory, 2001.
- Environmental Protection Agency, U.S.: US EPA Audit of RAMA Network, http://www.sma.df.gob.mx/sma/download/archivos/auditoria_epa_ingles.pdf, 2003.
- Environmental Protection Agency, U.S.: National Ambient Air Monitoring Strategy, Office of Air Quality Planning and Standards, <http://www.epa.gov/ttn/amtic/files/ambient/monitorstrat/naamstrat2005.pdf>, 2005.
- Environmental Protection Agency, U.S.: Electronic Code of Federal Regulations, ecfr.gpoaccess.gov/, 2006.
- Fehsenfeld, F. C., Dickerson, R. R., Hubler, G., Luke, W. T., Nunnermacker, L. J., Williams, E. J., Roberts, J. M., Calvert, J. G., Curran, C. M., Delany, A. C., Eubank, C. S., Fahey, D. W., Fried, A., Gandrud, B. W., Langford, A. O., Murphy, P. C., Norton, R. B., Pickering, K. E., and Ridley, B. A.: A Ground-Based Intercomparison of NO, NO_x, and NO_y Measurement Techniques, *J. Geophys. Res.*, 92(D12), 14 710–14 722, 1987.
- Fehsenfeld, F. C., Drummand, J. W., Roychowdhury, U. K., Galvin, P. J. W., E.J., Burh, M. P., Parrish, D. D., Hubler, G., Langford, A. O., Calvert, J. G., Ridley, B. A., Grahek, F., Heikes, B. G., Kok, G. L., Shetter, J. D., Walega, J. G., Elsworth, C. M., Norton, R. B., Fahey, D. W., Murphy, P. C., Hovermale, C., Mohnen, V. A., Demerjian, K. L., Mackay, G. I., and Schiff, H. I.: Intercomparison of NO₂ Measurement Techniques, *J. Geophys. Res.*, 95(D4), 3579–3597, 1990.
- Finlayson-Pitts, B. J. and Pitts, J. N.: *Chemistry of the Upper and Lower Atmosphere*, Academic Press, 2000.
- Flores, E., Grutter, M., Galle, B., Mellqvist, J., Samuelsson, J., Knighton, B., Jobson, B. T., Volkamer, R., Molina, L. T., and Molina, M. J., American Geophysical Union Fall Meeting, *EOS Trans.*, 85(47), Abstract A11A-0003, 2004.
- Fontijn, A., Sabadell, A. J., and Ronco, R. J.: Homogeneous chemiluminescence measurement of nitric oxide with ozone, *Anal. Chem.*, 42, 575–579, 1970.
- Friedeburg, C. v., Pundt, I., Mettendorf, K.-U., Wagner, T., and Platt, U.: Multi-axis-DOAS measurements of NO₂ during the BAB II motorway emission campaign, *Atmos. Environ.*, 39, 977–985, 2005.
- Gaffney, J. S., Marley, N. A., Cunningham, M. M., and Doskey, P. V.: Measurements of peroxyacyl nitrates (PANS) in Mexico City: implications for megacity air quality impacts on regional scales, *Atmos. Environ.*, 33, 30, 5003–5012, 1999.
- Garcia, A. R., Volkamer, R., Molina, L. T., Molina, M. J., Samuelsson, J., Mellqvist, J., Galle, B., Herndon, S. C., and Kolb, C. E.: Separation of emitted and photochemical formaldehyde in Mexico City using a statistical analysis and a new pair of gas-phase tracers, *Atmos. Chem. Phys.*, 6, 4545–4557, 2006, <http://www.atmos-chem-phys.net/6/4545/2006/>.
- Gregory, G. L., Hoell, J. M., Carroll, M. A., Ridley, B. A., Davis, D. D., Bradshaw, J., Rodgers, M. O., Sandholm, S. T., Schiff, H. I., Hastie, D. R., Karecki, D. R., Mackay, G. I., Harris, G. W., Torres, A. L., and Fried, A.: An Intercomparison of Airborne Nitrogen Dioxide Instruments, *J. Geophys. Res.*, 95(D7), 10 103–10 127, 1990.
- Grutter, M.: Multi-Gas analysis of ambient air using FTIR spectroscopy over Mexico City, *Atmosfera*, 16, 1, 1–13, 2003.
- Herndon, S. C., Jayne, J. T., Zahniser, M. S., Worsnop, D. R., Knighton, W. B., Alwine, E., Lamb, B., Zavala, M., Nelson, D. D., McManus, B., Shorter, J. H., Canagaratna, M. R., Onasch, T. B., and Kolb, C. E.: Characterization of urban pollutant emission fluxes and ambient concentration distributions using a mobile laboratory with rapid response instrumentation, *Faraday Discuss.*, 130, 327–339, 2005a.
- Herndon, S. C., Yongquan, L., Nelson, D. D., and Zahniser, M. S.: Determination of line strengths for selected transitions in the ν_2 band relative to the U₁ and N₂ bands of H₂CO, *J. Quant. Spectros. Radiat. Transfer*, 90, 207–216, 2005b.
- Jayne, J. T., Leard, D. C., Zhang, X., Davidovits, P., Smith, K. A., Kolb, C. E., and Worsnop, D. R.: Development of an Aerosol Mass Spectrometer for Size and Composition Analysis of Sub-micron Particles, *Aerosol Sci. Technol.*, 33, 1–2, 49–70, 2000.
- Jenkin, M. E.: Analysis of sources and partitioning of oxidant in the UK – Part 2: contributions of nitrogen dioxide emissions and background ozone at a kerbside location in London, *Atmos. Env.*, 38, 5131–5138, 2004a.
- Jenkin, M. E.: Analysis of sources and partitioning of oxidant in the UK – Part 1: the NO_x-dependence of annual mean concentrations of nitrogen dioxide and ozone, *Atmos. Environ.*, 38, 5117–5129, 2004b.
- Jenkin, M. E., Saunders, S. M., Wagner, V., and Pilling, M. J.: Protocol for the development of the Master Chemical Mechanism, MCM v3 (Part B): tropospheric degradation of aromatic volatile organic compounds, *Atmos. Chem. Phys.*, 3, 181–193, 2003, <http://www.atmos-chem-phys.net/3/181/2003/>.
- Jimenez, J. L., McCrae, G. J., Nelson, D. D., Zahniser, M. S., and Kolb, C. E.: Remote Sensing of NO and NO₂ Emissions from Heavy-Duty Diesel Trucks Using Tunable Diode Lasers, *Environ. Sci. Technol.*, 34, 12, 2380–2387, 2000.
- Kebabian, P. L., Herndon, S. C., and Freedman, A.: Detection of Nitrogen Dioxide by Cavity Attenuated Phase Shift Spectroscopy, *Anal. Chem.*, 77, 724–728, 2005.
- Kley, D. and McFarland, M.: Chemiluminescence detector for NO and NO₂, *Atmos. Tech.*, 12, 63–69, 1980.
- Kolb, C. E., Herndon, S. C., McManus, J. B., Shorter, J. H., Zahniser, M. S., Nelson, D. D. J., Jayne, J. T., Canagaratna, M. R., and Worsnop, D. R.: Mobile Laboratory with Rapid Response Instruments for Real-Time Measurements of Urban and Regional Trace Gas and Particulate Distributions and Emission Source Characteristics, *Environ. Sci. Technol.*, 38, 5694–5703, 2004.
- Latham, S., Kollamthodi, S., Boulter, P. G., Nelson, P. M., and Hickman, A. J.: Assessment of primary NO₂ emissions, hydrocarbon speciation and particulate sizing on a range of road vehicles, Report PR/SE/353/2001, Transport Research Laboratory (TRL), 2001.
- Li, Y. Q., Demerjian, K. L., Zahniser, M. S., Nelson, D. D., McManus, J. B., and Herndon, S. C.: Measurement of formaldehyde, nitrogen dioxide, and sulfur dioxide at Whiteface Moun-

- tain using a dual tunable diode laser system, *J. Geophys. Res.*, 109, D16S08, doi:10.1029/2003JD004091, 2004.
- Madronich, S.: Chemical evolution of gaseous air pollutants downwind of tropical megacities: Mexico City case study, *Atmos. Environ.*, 40, 6012–6018, 2006.
- Marley, N. A., Gaffney, J. S., Ramos-Villegas, R., and Cardenas Gonzalez, B.: Comparison of measurements of peroxyacyl nitrates and primary carbonaceous aerosol concentrations in Mexico City determined in 1997 and 2003, *Atmos. Chem. Phys.*, 7, 2277–2285, 2007, <http://www.atmos-chem-phys.net/7/2277/2007/>.
- Marley, N. A., Gaffney, J. S., White, R. V., Rodriguez-Cuadra, L., Herndon, S. C., Kolb, C. E., Dunlea, E. J., Volkamer, R. M., Molina, L. T., and Molina, M. J.: Fast Gas Chromatography with Luminol Chemiluminescent Detection for the Simultaneous Determination of Nitrogen Dioxide (NO₂) and Peroxyacetyl Nitrate (PAN) in the Atmosphere, *Rev. Sci. Instr.*, 75, 4595–4605, 2004.
- McClenny, W. A., Williams, E. J., Cohen, R. C., and Stutz, J.: Preparing to Measure the Effects of the NO_x SIP Call – Methods for Ambient Air Monitoring of NO, NO₂, NO_y, and Individual NO_z Species, *J. Air Waste Manage. Assoc.*, 52, 542–562, 2002.
- McManus, J. B., Keabian, P. L., and Zahniser, M. S.: Astigmatic mirror multiple pass absorption cells for long pathlength spectroscopy, *Appl. Opt.*, 34, 3336–3348, 1995.
- Molina, L. T., Kolb, C. E., De Foy, B., Lamb, B. K., Brune, W. H., Jimenez, J. L., and Molina, M. J.: Air quality in North America's most populous city—overview of MCMA-2003 Campaign, *Atmos. Chem. Phys.*, 7, 2447–2473, 2007, <http://www.atmos-chem-phys.net/7/2447/2007/>.
- Moya, M., Grutter, M., and Baez, A.: Diurnal variability of size-differentiated inorganic aerosols and their gas-phase precursors during January and February of 2003 near downtown Mexico City, *Atmos. Environ.*, 38, 5651–5661, 2004.
- Neuman, J. A., Huey, L. G., Ryerson, T. B., and Fahey, D. W.: Study of Inlet Materials for Sampling Atmospheric Nitric Acid, *Environ. Sci. Technol.*, 33, 1133–1136, 1999.
- Neuman, J. A., Parrish, D. D., Ryerson, T. B., Brock, C. A., Wiedinmyer, C., Frost, G. J., Holloway, J. S., and Fehsenfeld, F. C.: Nitric acid loss rates measured in power plant plumes, *J. Geophys. Res.-Atmos.*, 109(D23), D23304, doi:10.1029/2004JD005092, 2004.
- Ordóñez, C., Richter, A., Steinbacher, M., Zellweger, C., Nüss, H., Burrows, J. P., and Prévôt, A. S. H.: Comparison between 7-years of satellite-borne and ground-based tropospheric NO₂ measurements around Milan, Italy, *J. Geophys. Res.*, 111, D05310, doi:10.1029/2005JD006305, 2006.
- Osthoff, H. D., Brown, S. S., Ryerson, T. B., Fortin, T. J., Lerner, B. M., Williams, E. J., Pettersson, A., Baynard, T., Dube, W. P., Ciciora, S. J., and Ravishankara, A. R.: Measurement of atmospheric NO₂ by pulsed cavity ring-down spectroscopy, *J. Geophys. Res.*, 111, D12305, doi:10.1029/2005JD006942, 2006.
- Parrish, D. D. and Fehsenfeld, F. C.: Methods for gas-phase measurements of ozone, ozone precursors and aerosol precursors, *Atmos. Environ.*, 34, 1921–1957, 2000.
- Platt, U.: Chapter 2, Sigrist, M. W., *Monitoring by Spectroscopic Techniques*, Wiley & Sons, 1994.
- Platt, U. and Perner, D.: Direct Measurements of Atmospheric CH₂O, HNO₂, O₃, NO₂ and SO₂ by Differential Optical Absorption in the Near UV, *J. Geophys. Res.*, 85, 7453–7458, 1980.
- Pundt, I., Mettendorf, K.-U., Laepple, T., Knab, V., Xie, P., Losch, J., Friedeburg, C. v., Platt, U., and Wagner, T.: Measurements of trace gas distributions using Long-path DOAS-Tomography during the motorway campaign BAB II: experimental setup and results for NO₂, *Atmos. Environ.*, 39, 967–975, 2005.
- RAMA: Red Automatica de Monitoreo Atmosferico, http://148.243.232.103/imecaweb/base_datos.htm, 2005.
- Ridley, B. A. and Howlett, L. C.: An instrument for nitric oxide measurements in the stratosphere, *Rev. Sci. Instr.*, 45, 742–746, 1974.
- Rogers, T. M., Grimsrud, E. P., Herndon, S. C., Jayne, J. T., Kolb, C. E., Allwine, E., Westberg, H., Lamb, B. K., Zavala, M., Molina, L. T., Molina, M. J., and Knighton, W. B.: On-road measurement of volatile organic compounds in the Mexico City metropolitan area using proton transfer reaction mass spectrometry, *Int. J. Mass Spec.*, 252, 26–37, 2006.
- Rosen, R. S., Wood, E. C., Wooldridge, P. J., Thornton, J. A., Day, D. A., Kuster, W., Williams, E. J., Jobson, B. T., and Cohen, R. C.: Observations of total alkyl nitrates during Texas Air Quality Study 2000: Implications for O₃ and alkyl nitrate photochemistry, *J. Geophys. Res.*, 109, D07303, doi:10.1029/2003JD004227, 2004.
- Rothman, L. S., Barbe, A., Benner, D. C., Brown, L. R., Camy-Peyret, C., Carleer, M. R., Chance, K., Clerbaux, C., Dana, V., Devi, V. M., Fayt, A., Flaud, J. M., Gamache, R. R., Goldman, A., Jacquemart, D., Jucks, K. W., Lafferty, W. J., Mandin, J. Y., Massie, S. T., Nemtchinov, V., Newnham, D. A., Perrin, A., Rinsland, C. P., Schroeder, J., Smith, K. M., Smith, M. A. H., Tang, K., Toth, R. A., Vander Auwera, J., Varanasi, P., and Yoshino, K.: The HITRAN molecular spectroscopic database: edition of 2000 including updates through 2001, *J. Quant. Spectros. Radiat. Transfer*, 82, 5–44, 2003.
- Salcedo, D., Onasch, T. B., Dzepina, K., Canagaratna, M. R., Zhang, Q., Huffman, J. A., DeCarlo, P. F., Jayne, J. T., Mortimer, P., Worsnop, D. R., Kolb, C. E., Johnson, K. S., Zuberi, B., Marr, L. C., Volkamer, R., Molina, L. T., Molina, M. J., Cardenas, B., Bernabe, R. M., Marquez, C., Gaffney, J. S., Marley, N. A., Laskin, A., Shutthanandan, V., Xie, Y., Brune, W., Leshner, R., Shirley, T., and Jimenez, J. L.: Characterization of Ambient Aerosols in Mexico City during the MCMA-2003 Campaign with Aerosol Mass Spectrometry: Results at the CENICA Super-site, *Atmos. Chem. Phys.*, 6, 925–946, 2006, <http://www.atmos-chem-phys.net/6/925/2006/>.
- San Martini, F. M., Dunlea, E. J., Grutter, M., Onasch, T. B., Jayne, J. T., Canagaratna, M. R., Worsnop, D. R., Kolb, C. E., Shorter, J. H., Herndon, S. C., Zahniser, M. S., Ortega, J. M., McRae, G. J., Molina, L. T., and Molina, M. J.: Implementation of a Markov Chain Monte Carlo Method to inorganic aerosol modeling of observations from the MCMA-2003 Campaign. Part I: Model description and application to the La Merced Site, *Atmos. Chem. Phys.*, 6, 4867–4888, 2006a.
- San Martini, F. M., Dunlea, E. J., Volkamer, R., Onasch, T. B., Jayne, J. T., Canagaratna, M. R., Worsnop, D. R., Kolb, C. E., Shorter, J. H., Herndon, S. C., Zahniser, M. S., Salcedo, D., Dzepina, K., Jimenez, J. L., Ortega, J. M., Johnson, K. S., McRae, G. J., Molina, L. T., and Molina, M. J.: Implementation of a Markov Chain Monte Carlo Method to inorganic aerosol modeling of observations from the MCMA-2003 Campaign. Part

- II: Model application to the CENICA, Pedregal and Santa Ana sites, *Atmos. Chem. Phys.*, 6, 4889–4904, 2006b.
- Saunders, S. M., Jenkin, M. E., Derwent, R. G., and Pilling, M. J.: Protocol for the development of the Master Chemical Mechanism, MCM v3 (Part A): tropospheric degradation of non-aromatic volatile organic compounds, *Atmos. Chem. Phys.*, 3, 161–180, 2003, <http://www.atmos-chem-phys.net/3/161/2003/>.
- Schaub, D., Boersma, K. F., Kaiser, J. W., Weiss, A. K., Folini, D., Eskes, H. J., and Buchmann, B.: Comparison of GOME tropospheric NO₂ columns with NO₂ profiles deduced from ground-based in situ measurements, *Atmos. Chem. Phys.*, 6, 3211–3229, 2006, <http://www.atmos-chem-phys.net/6/3211/2006/>.
- Sickles II, J. E. and Nriagu, J. O.: *Gaseous Pollutants: Characterization and Cycling*, John Wiley & Sons, Inc., 1992.
- Smith, M. A. H., Rinsland, C. P., Fridovich, B., and Rao, K. N.: *Molecular Spectroscopy: Modern Research*, Academic Press, Inc., 1985.
- Steinbacher, M., Zellweger, C., Schwarzenbach, B., Bugmann, S., Buchmann, B., Ordóñez, C., Prevot, A. S. H., and Hueglin, C.: Nitrogen Oxides Measurements at Rural Sites in Switzerland: Bias of Conventional Measurement Techniques, *J. Geophys. Res.*, accepted, 2007.
- Thornton, J. A., Wooldridge, P. J., and Cohen, R. C.: Atmospheric NO₂: In Situ Laser-Induced Fluorescence Detection at Parts per Trillion Mixing Ratios, *Anal. Chem.*, 72, 528–539, 2000.
- Thornton, J. A., Wooldridge, P. J., Cohen, R. C., Williams, E. J., Hereid, D., Fehsenfeld, F. C., Stutz, J., and Alicke, B.: Comparisons of in situ and long path measurements of NO₂ in urban plumes, *J. Geophys. Res.*, 108(D16), 4496, doi:10.1029/2003JD003559, 2003.
- Trainer, M., Buhr, M. P., Curran, C. M., Fehsenfeld, F. C., Hsie, E. Y., Liu, S. C., Norton, R. B., Parrish, D. D., Williams, E. J., Gandrud, B. W., Ridley, B. A., Shetter, J. D., Allwine, E. J., and Westberg, H. H.: Observations and modeling of the reactive nitrogen photochemistry at a rural site, *J. Geophys. Res.*, 96(D2), 3045–3063, 1991.
- Velasco, E., Lamb, B., Westberg, H., Allwine, E., Sosa, G., Arriaga-Colina, J. L., Jobson, B. T., Alexander, M. L., Prazeller, P., Knighton, W. B., Rogers, T. M., Grutter, M., Herndon, S. C., Kolb, C. E., Zavala, M., Foy, B. d., Volkamer, R., Molina, L. T., and Molina, M. J.: Distribution, magnitudes, reactivities, ratios and diurnal patterns of volatile organic compounds in the Valley of Mexico during the MCMA 2002 & 2003 field campaigns, *Atmos. Chem. Phys.*, 7, 329–353, 2007, <http://www.atmos-chem-phys.net/7/329/2007/>.
- Volkamer, R., Etzkorn, T., Geyer, A., and Platt, U.: Correction of the oxygen interference with UV spectroscopic (DOAS) measurements of monocyclic aromatic hydrocarbons in the atmosphere, *Atmos. Environ.*, 32, 3731–3747, 1998.
- Volkamer, R., Molina, L. T., Molina, M. J., Shirley, T., and Brune, B.: DOAS measurement of glyoxal as an indicator for fast VOC chemistry in urban air, *Geophys. Res. Lett.*, 32, L08806, doi:10.1029/2005GL022616, 2005.
- Wesely, M. L. and Hicks, B. B.: A review of the current status of knowledge on dry deposition, *Atmos. Environ.*, 34, 2261–2282, 2000.
- Williams, E. J., Baumann, K., Roberts, J. M., Bertman, S. B., Norton, R. B., Fehsenfeld, F. C., S.R. Springston, Nunnermacker, L. J., Newman, L., Olszyna, K., Meagher, J., Hartsell, B., Edgerton, E., Pearson, J. R., and Rodgers, M. O.: Intercomparison of ground-based NO_y measurement techniques, *J. Geophys. Res.*, 103, 2226–22280, 1998.
- Winer, A. M., Peters, J. W., Smith, J. P., and James N. Pitts, J.: Response of Commercial Chemiluminescent NO-NO₂ Analyzers to Other Nitrogen-Containing Compounds, *Environ. Sci. Technol.*, 8, 13, 1118–1121, 1974.